


Size of graphic panels

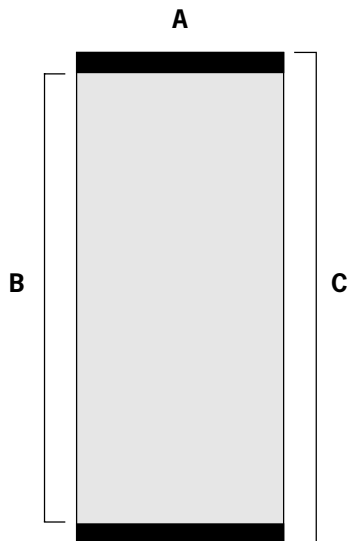

The overall SnapUp graphic consists of a number of separate graphic panels as follows:

Structure 4x3 = 4 centre panels + 2 end panels (for a double sided model add 4 rear panels)

Structure 3x3 = 3 centre panels + 2 end panels (for a double sided model add 3 rear panels)

Structure 2x3 = 2 centre panels + 2 end panels (for a double sided model add 2 rear panels)

Structure 1x3 = 1 centre panel + 2 end panels (for a double sided model add 1 rear panel)

The size of each panel for the different SnapUp models is as follows:

	FRONT CENTRE PANELS			END PANELS			REAR CENTRE PANELS*		
	A	B	C	A	B	C	A	B	C
MP 1 curved	700	2175	2255	400/500	2175	2255	795	2175	2255
MP 2 curved	673	2145	2225	673	2145	2225	800	2145	2225
MP 2 straight	728	2145	2225	673	2145	2225	728	2145	2225
MP 2 Value, 2x2	1000	2145	2225	673	2145	2225	1245	2145	2225
MP 2 tower	691	2145	2225	—	—	—	—	—	—
MP 2 Mini counter	328	1005	—	460	1005	—	—	—	—
MP 2 Literature rack	328	1005	—	460	1005	—	—	—	—
1x3	328	1005	—	460	1005	—	—	—	—
1x4	328	1335	—	460	1335	—	—	—	—
MP 2 Reception desk	2480	870	—	—	—	—	—	—	—
Hard case/Counter	2030	800	—	—	—	—	—	—	—

* Only for double sided model

Lamination

The printed graphic panels must be laminated before use.

We recommend the following material:

Front side – Centre and end panels:

150 microns (0,150 mm) "deep crystal"

Reverse side – Centre panels:

220-250 microns (0,220 - 0,250 mm) "stop light"

Reverse side – End panels:

115-125 microns (0,115 - 0,125 mm) "stop light"

**We recommend
to roll the banner
with the printed
side out!**

Application Techniques


To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.

Mounting of Kickers and Hangers

Kickers and hangers to be fixed at the bottom and at the top of the graphic panels (reverse side).

Hangers

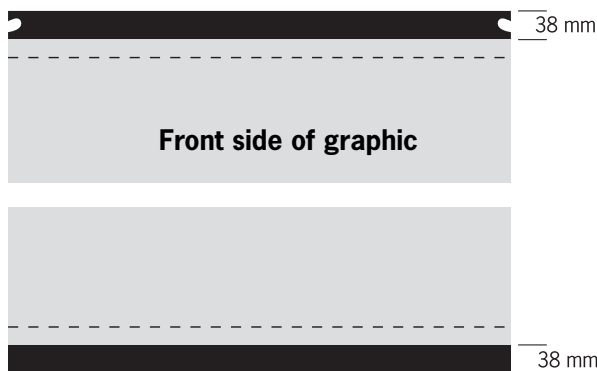


Kickers

Please observe!

Kickers and hangers for the endpanels are thinner.

Mounting of Magnetic Tape

Magnetic tape to be fixed vertically along each side of the graphic panels.

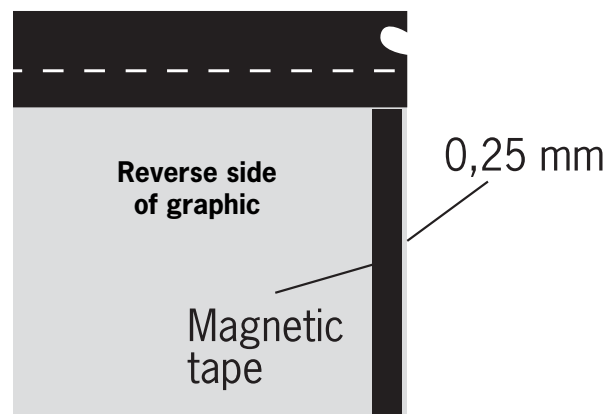

IMPORTANT

Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by **approximately 0,25 mm**. Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. **Do not exceed 0,5 mm.**